PRODUCT INFORMATION PACKET

marathon®

Model No: 326TTFCD6070 Catalog No: GT1037A-P

Globetrotter® General Purpose Motor, 50 & 40 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V,

1800 & 1500 RPM, 326T Frame, TEFC



©2025 Marathon, All Rights Reserved.




Nameplate Specifications

Phase	3	Output HP	50 & 40 Hp
Output KW	37.0 & 30.0 kW	Voltage	230/460 & 190/380 V
Speed	1782 & 1482 r/min	Service Factor	1.15 & 1.15
Frame	326T	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	94.5 & 93.9 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	117/58.5 & 114/57 A	Power Factor	85
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	G
Drive End Bearing Size	6312	Opp Drive End Bearing Size	6212
UL	Recognized	CSA	Υ
CE	Υ	IP Code	55
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Part Wdg Start Low Volt Only & Wye Start Delta Run Or Inverter
Poles	4	Rotation	Reversible
Resistance Main	.127 O	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	Т	Shaft Diameter	2.125 in
Assembly/Box Mounting	F1/F2 CAPABLE	Inverter Load	CONSTANT 2:1/VARIABLE 10:1
Connection Drawing	EE7308AA	Outline Drawing	SS312782-200

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:05/17/2025

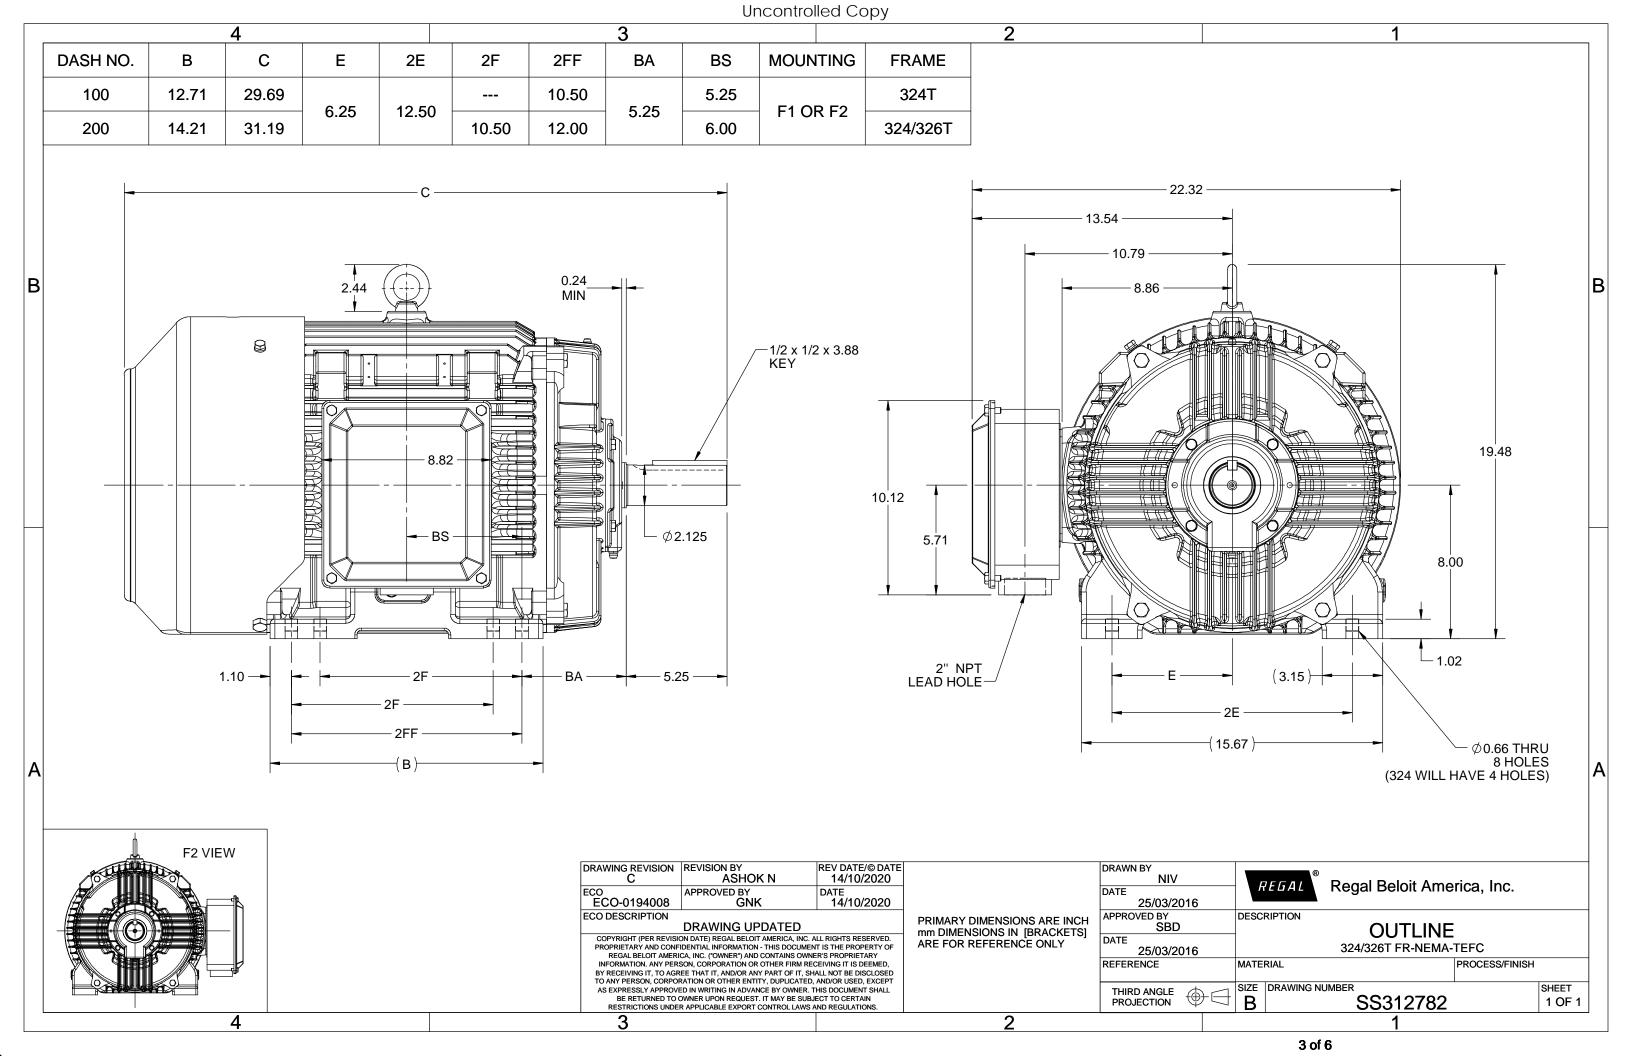

Uncontrolled Copy T12 (W4) T1 (U1) -T6 (W2) -T7 (U3) -T2 (V1) -T4 (U2) -- T6 (W2) T8 (V3) -- T9 (W3) T10 (U4) - T12 (W4) T3 (W1) - T1 (U1) T5 (V2) -T4 (U2) T9 (W3) -T7 (U3) T11 (V4) -T10 (U4) LOW VOLTAGE T2 (V1) T8 T5 Ti 111 T5 (V2) T12 (W4) - T8 (V3) T1 (U1) - T11 (V4) T4 (U2) - T3 (W1) T7 (U3) -T2 (V1) T10 (U4) -T5 (V2) T8 (V3) -T3 (W1) VIEW OF TERMINAL END T11 (V4) T6 (W2) T9 (W3) **HIGH VOLTAGE** DRAWING REVISION REVISION BY DRAWN BY 07-17-2015 LZ AJW REGAL Regal Beloit America, Inc. APPROVED BY ECO T. VUE 07-17-2015 ECO-0081632 01-12-1994 ECO DESCRIPTION APPROVED BY DESCRIPTION REV'D IEC MARKINGS PER IEC 60034-8 GK CONN DIAGRAM-EXTERNAL COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED. DATE 3Ø-2/1 DELTA-12 LEADS 01-14-1994 REFERENCE MATERIAL PROCESS/FINISH BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT SIZE DRAWING NUMBER SHEET AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL THIRD ANGLE

PROJECTION

BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN

RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS

4 of 6

EE7308AA

1 OF 1





EC Declaration of Conformity

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401 and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 326TTFCD6070

(Model No. may contain prefix and/or suffix characters)

Catalog No: GT1037A-P

Rework No: N/A

Directives:

Low Voltage Directive 2014/35/EU

Harmonized Standards Used:

EN 60034-1: 2010 (IEC 60034-1: 2010)

Michael A Logsdon

EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

Michael A. Logsdon Vice President, Technology

Created on 09/01/2022

Authorized Representative in the Community:

J. cerse

Julian Clark Marketing Engineer